


# 2 Watts IU Series

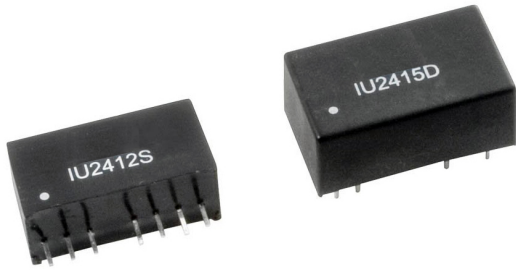

- Regulated Single & Dual Output
- Wide 2:1 Input Range
- SIP or DIP Package
- 1000 VDC Isolation (Optional 3000 VDC)
- Continuous Short Circuit Protection
- 3 Year Warranty

## Specification

### Input

- Input Voltage Range • See table
- Input Reflected Ripple Current • 35 mA pk-pk through 12  $\mu$ H inductor, 5-20 MHz
- Input Filter • Capacitor

### Output

- Output Voltage • See table
- Minimum Load • None<sup>(6)</sup>
- Line Regulation •  $\pm 0.5\%$
- Load Regulation •  $\pm 1\%$  for a 25-100% load change<sup>(7)</sup>
- Setpoint Accuracy •  $\pm 2\%$
- Cross Regulation •  $\pm 5\%$  on dual output models
- Ripple & Noise • 80 mV pk-pk max, 20 MHz bandwidth<sup>(6)</sup>
- Short Circuit Protection • Continuous with auto recovery (foldback)
- Max Capacitive Load • See table
- Remote On/Off • Optional on SIP package model<sup>(4)</sup>
- Temperature Coefficient • 0.02%/C

### General

- Efficiency • See table
- Isolation Voltage • 1000 VDC, Optional 3000 VDC<sup>(2)</sup>
- Isolation Resistance •  $10^9 \Omega$
- Isolation Capacitance • 60 pF
- Switching Frequency • 100-650 kHz
- MTBF •  $> 1.61$  Mhrs to MIL-HDBK-217F, at 25  $^{\circ}$ C, GB

### Environmental

- Operating Temperature • -40  $^{\circ}$ C to +85  $^{\circ}$ C
- Storage Temperature • -40  $^{\circ}$ C to +125  $^{\circ}$ C
- Case Temperature • +100  $^{\circ}$ C max
- Cooling • Convection cooled

### Safety


- Safety Approvals • UL62368-1

### Notes

- For dual inline package replace 'S' in model number with 'D'.
- For optional 3 kV isolation add suffix '-H' to the model number.
- For dual output delete suffix 'A' & split output current equally between rails.
- For optional Remote On/Off on SIP models, add suffix '-R' to model number. Applying 5V via 1 k  $\Omega$  current limiting resistor and diode turns output off.
- Output capacitor of 100  $\mu$ F required to meet quoted ripple & noise.
- Minimum load of 25% required to meet load regulation & ripple & noise specifications.
- Operation at no load will not damage device but may not meet all specifications.
- Pin pitch tolerance:  $\pm 0.014$  ( $\pm 0.35$ ), Case tolerance:  $\pm 0.02$  ( $\pm 0.5$ )
- Weight: SIP 0.009 lbs (4.0 g), DIP 0.013 lbs (6.0 g)

Input Voltage	No Load Input Current	Output Voltage <sup>(3)</sup>	Output Current	Max. Capacitive Load	Efficiency	Model Number (1-5)
4.5-9.0 V	15 mA	3.3V	500 mA	3300 $\mu$ F	67%	IU0503SA
	15 mA	5.0V	400 mA	3300 $\mu$ F	70%	IU0505SA
	30 mA	9.0V	222 mA	470 $\mu$ F	72%	IU0509SA
	30 mA	12.0V	167 mA	470 $\mu$ F	72%	IU0512SA
	30 mA	15.0V	133 mA	470 $\mu$ F	73%	IU0515SA
	60 mA	24.0V	83 mA	220 $\mu$ F	75%	IU0524SA
9.0-18.0 V	15 mA	3.3V	500 mA	3300 $\mu$ F	67%	IU1203SA
	15 mA	5.0V	400 mA	3300 $\mu$ F	77%	IU1205SA
	15 mA	9.0V	222 mA	470 $\mu$ F	78%	IU1209SA
	15 mA	12.0V	167 mA	470 $\mu$ F	80%	IU1212SA
	15 mA	15.0V	133 mA	470 $\mu$ F	78%	IU1215SA
	15 mA	24.0V	83 mA	220 $\mu$ F	80%	IU1224SA
18.0-36.0 V	8 mA	3.3V	500 mA	3300 $\mu$ F	70%	IU2403SA
	8 mA	5.0V	400 mA	3300 $\mu$ F	77%	IU2405SA
	8 mA	9.0V	222 mA	470 $\mu$ F	80%	IU2409SA
	8 mA	12.0V	167 mA	470 $\mu$ F	80%	IU2412SA
	8 mA	15.0V	133 mA	470 $\mu$ F	80%	IU2415SA
	8 mA	24.0V	83 mA	220 $\mu$ F	80%	IU2424SA
36.0-72.0 V	6 mA	3.3V	500 mA	3300 $\mu$ F	71%	IU4803SA
	6 mA	5.0V	400 mA	3300 $\mu$ F	74%	IU4805SA
	6 mA	9.0V	222 mA	470 $\mu$ F	78%	IU4809SA
	6 mA	12.0V	167 mA	470 $\mu$ F	78%	IU4812SA
	6 mA	15.0V	133 mA	470 $\mu$ F	78%	IU4815SA
	6 mA	24.0V	83 mA	220 $\mu$ F	80%	IU4824SA

### Mechanical Details

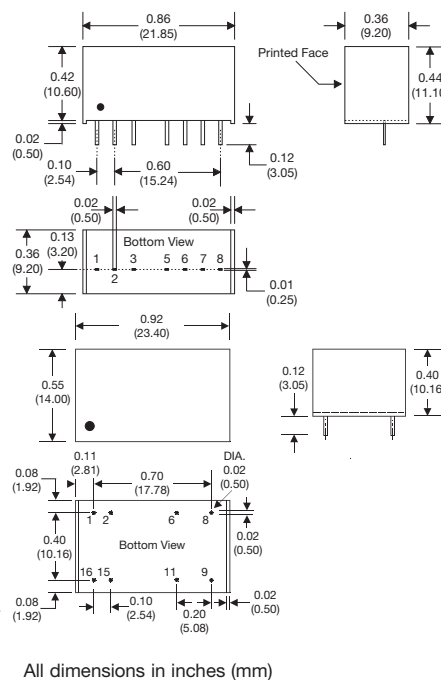

PIN CONNECTIONS		
Pin	Single	Dual
1	-V Input	-V Input
2	+V Input	+V Input
3	Opt. ROF*	Opt. ROF**
5	N.P. / N.C.	N.C.
6	+V Output	+V Output
7	-V Output	-V Output
8	NC	Common

- \* When optional ROF is present pin 5 is No Connection. When not present pin 3 & 5 are No Pin.
- \*\* When optional ROF is present pin 5 is No Connection. When not present pin 3 & 5 are No Connection.

PIN CONNECTIONS		
Pin	Single	Dual
1	-V Input	-V Input
2	-V Input	-V Input
6	NC	Common
8	NC	-V Output
9	+V Output	+V Output
11	-V Output	Common
15	+V Input	+V Input
16	+V Input	+V Input