

JCK Series



- 2:1 Input Range
- Very High Power Density
- Single and Dual Outputs
- High Efficiency – Up to 92%
- Remote On/Off
- 1600 VDC Isolation
- 3 Year Warranty

Specification

Input

- | | |
|--------------------------------|--|
| Input Voltage Range | <ul style="list-style-type: none"> • 12 V (9-18 VDC), 24 V (18-36 VDC), 48 V (36-75 VDC) |
| Input Current | <ul style="list-style-type: none"> • See table |
| Input Reflected Ripple Current | <ul style="list-style-type: none"> • 20 mA pk-pk through 12 μH inductor, 5 Hz to 20 MHz |
| Undervoltage Lockout | <ul style="list-style-type: none"> • 12 V models: ON 8.6 V, OFF 7.9 V typical • 24 V models: ON 17.8 V, OFF 16 V typical • 48 V models: ON 33.5 V, OFF 30.5 V typical |
| Input Surge | <ul style="list-style-type: none"> • 12 V models 25 VDC for 1000 ms • 24 V models 50 VDC for 1000 ms • 48 V models 100 VDC for 1000 ms |

Output

- | | |
|--------------------------|--|
| Output Voltage | <ul style="list-style-type: none"> • See table |
| Output Voltage Trim | <ul style="list-style-type: none"> • $\pm 10\%$ on single outputs models only, contact sales for details |
| Minimum Load | <ul style="list-style-type: none"> • No minimum load required |
| Line Regulation | <ul style="list-style-type: none"> • $\pm 0.5\%$ max |
| Load Regulation | <ul style="list-style-type: none"> • Single output models: $\pm 0.5\%$ max • Dual output models: $\pm 1\%$ max balanced outputs |
| Cross Regulation | <ul style="list-style-type: none"> • $\pm 5\%$ (see note 2) |
| Setpoint Accuracy | <ul style="list-style-type: none"> • $\pm 1\%$ |
| Start Up Time | <ul style="list-style-type: none"> • 30 ms typical |
| Ripple & Noise | <ul style="list-style-type: none"> • 100 mV for 3V3 +5V models, 150 mV for other models (see note 3) |
| Transient Response | <ul style="list-style-type: none"> • 3% max deviation, recovery to within 1% in $<250 \mu$s for a 25% load change |
| Temperature Coefficient | <ul style="list-style-type: none"> • 0.02%/$^{\circ}$C |
| Overvoltage Protection | <ul style="list-style-type: none"> • 3.3 V models: 3.9 V typical • 5 V models: 6.2 V typical • 12 V models: 15 V typical • 15 V models: 18 V typical • ± 12 V models: ± 15 V typical • ± 15 V models: ± 18 V typical |
| Overload Protection | <ul style="list-style-type: none"> • 115-130% of output current |
| Short Circuit Protection | <ul style="list-style-type: none"> • Trip & restart (Hiccup mode), auto recovery |
| Remote On/Off | <ul style="list-style-type: none"> • On = Logic High (>3.0) or Open • Off = Logic Low (<1.2 V) or short pin 2 to 3 |

General

- | | |
|-----------------------|---|
| Efficiency | <ul style="list-style-type: none"> • See table |
| Isolation | <ul style="list-style-type: none"> • 1600 VDC Input to Output • 1600 VDC Input to Case • 1600 VDC Output to Case |
| Isolation Capacitance | <ul style="list-style-type: none"> • 1000 pF typical |
| Switching Frequency | <ul style="list-style-type: none"> • 270 kHz typical |
| Power Density | <ul style="list-style-type: none"> • 50 W/in³ |
| MTBF | <ul style="list-style-type: none"> • 330 kHrs min to MIL-HDBK-217F at 25 $^{\circ}$C, GB |

Environmental

- | | |
|-----------------------|---|
| Operating Temperature | <ul style="list-style-type: none"> • -40 $^{\circ}$C to +70 $^{\circ}$C, derate from 100% load at 55 $^{\circ}$C to 60% load at 70 $^{\circ}$C |
| Case Temperature | <ul style="list-style-type: none"> • +105 $^{\circ}$C max |
| Cooling | <ul style="list-style-type: none"> • Convection-cooled |
| Operating Humidity | <ul style="list-style-type: none"> • 5-95% RH, non-condensing |
| Storage Temperature | <ul style="list-style-type: none"> • -40 $^{\circ}$C to +125 $^{\circ}$C |

EMC

- | | |
|--------------------|---|
| Emissions | <ul style="list-style-type: none"> • EN55022 class B conducted & radiated with external components, see application note |
| ESD Immunity | <ul style="list-style-type: none"> • EN61000-4-2, 4 kV contact discharge, Perf Criteria B |
| Radiated Immunity | <ul style="list-style-type: none"> • EN61000-4-3, 3 V/m, Perf Criteria A |
| EFT/Burst | <ul style="list-style-type: none"> • EN61000-4-4, level 1, Perf Criteria A* |
| Surge | <ul style="list-style-type: none"> • EN61000-4-5, level 1, Perf Criteria A |
| Conducted Immunity | <ul style="list-style-type: none"> • EN61000-4-6, 3 Vrms, Perf Criteria A |
| Magnetic Field | <ul style="list-style-type: none"> • EN61000-4-8, 1 A/m, Perf Criteria A |

*External input capacitor required, 220 μ F/100 V.


Models and Ratings

Input Voltage	Output Voltage	Output Current	Input Current ⁽¹⁾		Maximum Capacitive Load	Efficiency	Model Number
			No Load	Full Load			
9-18 VDC	3.3 V	8.00 A	100 mA	2444 mA	21000 μ F	90%	JCK4012S3V3
	5.0 V	8.00 A	150 mA	3663 mA	13000 μ F	91%	JCK4012S05
	12.0 V	3.33 A	40 mA	3663 mA	2000 μ F	91%	JCK4012S12
	15.0 V	2.67 A	50 mA	3663 mA	1500 μ F	91%	JCK4012S15
	\pm 12.0 V	\pm 1.67 A	30 mA	3663 mA	\pm 1200 μ F	91%	JCK4012D12
	\pm 15.0 V	\pm 1.33 A	50 mA	3623 mA	\pm 750 μ F	92%	JCK4012D15
18-36 VDC	3.3 V	8.00 A	60 mA	1208 mA	21000 μ F	91%	JCK4024S3V3
	5.0 V	8.00 A	80 mA	1811 mA	13000 μ F	92%	JCK4024S05
	12.0 V	3.33 A	30 mA	1831 mA	2000 μ F	91%	JCK4024S12
	15.0 V	2.67 A	40 mA	1811 mA	1500 μ F	92%	JCK4024S15
	\pm 12.0 V	\pm 1.67 A	50 mA	1831 mA	\pm 1200 μ F	91%	JCK4024D12
	\pm 15.0 V	\pm 1.33 A	40 mA	1811 mA	\pm 750 μ F	92%	JCK4024D15
36-75 VDC	3.3 V	8.00 A	40 mA	604 mA	21000 μ F	91%	JCK4048S3V3
	5.0 V	8.00 A	60 mA	905 mA	13000 μ F	92%	JCK4048S05
	12.0 V	3.33 A	20 mA	915 mA	2000 μ F	91%	JCK4048S12
	15.0 V	2.67 A	20 mA	905 mA	1500 μ F	92%	JCK4048S15
	\pm 12.0 V	\pm 1.67 A	30 mA	906 mA	\pm 1200 μ F	92%	JCK4048D12
	\pm 15.0 V	\pm 1.33 A	40 mA	906 mA	\pm 750 μ F	92%	JCK4048D15

Notes

1. Input current specified at nominal input.
2. Cross regulation for duals is \pm 5% when one output is at 100% and the other is varied between 25% and 100%.
3. Measured with 1 μ F ceramic capacitor in parallel with a 10 μ F electrolytic across output rails.
4. For heatsink option add '-HK' to the end of the part number.

Mechanical Details

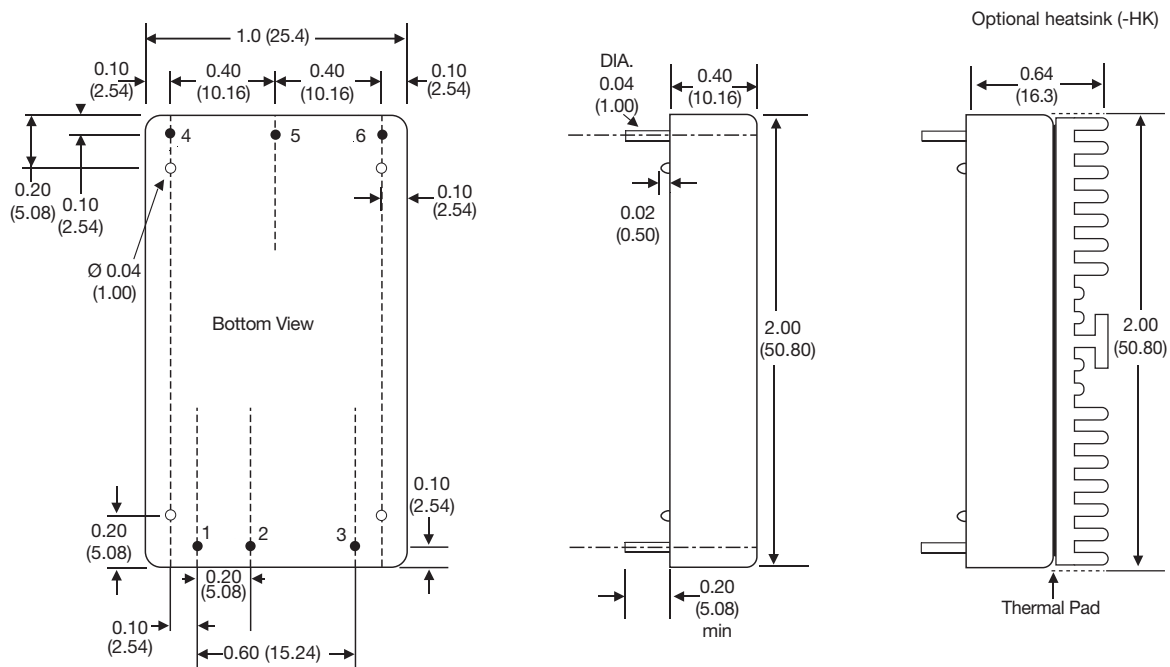


Notes

1. All dimensions are in inches (mm).
2. Weight: 0.07 lbs (30 g) approx
3. Pin diameter: 0.04 \pm 0.002 (1.0 \pm 0.05)
4. Pin pitch tolerance: \pm 0.014 (\pm 0.35)
5. Case tolerance: \pm 0.02 (\pm 0.5)

Pin	PIN CONNECTIONS	
	Single	Dual
1	+Vin	+Vin
2	-Vin	-Vin
3	Remote On/Off	Remote On/Off
4	+Vout	+Vout
5	Com	Com
6	Trim	-Vout

Application Notes


Input Filter

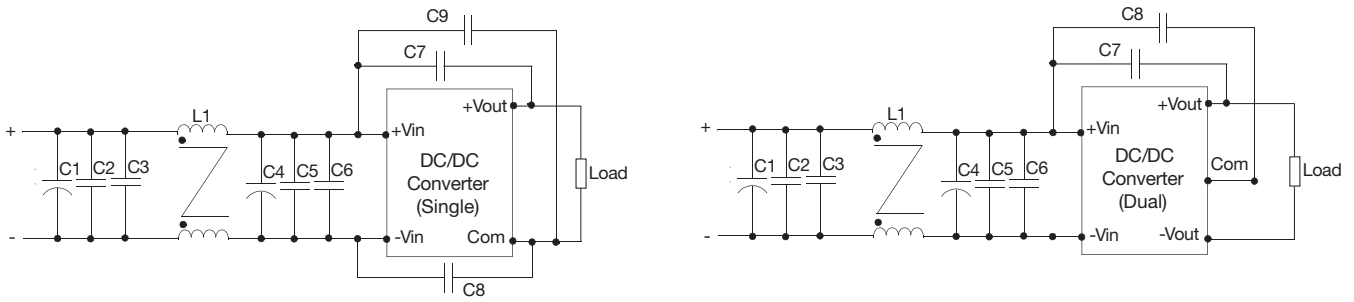

JCK40 Single	C1	L1	C2/C3/C5/C6	C4
12 V	220 μ F, 100 V	Common Mode Choke 68 μ H	6.8 μ F, 50 V	330 μ F, 100 V
24 V			4.7 μ F, 50 V	220 μ F, 100 V
48 V			1.5 μ F, 100 V	220 μ F, 100 V
JCK40 Dual	C1	L1	C2/C3/C5/C6	C4
12 V	220 μ F, 100 V	Common Mode Choke 68 μ H	6.8 μ F, 50 V	330 μ F, 100 V
24 V			4.7 μ F, 50 V	220 μ F, 100 V
48 V			1.5 μ F, 100 V	220 μ F, 100 V

JCK40 Single	C7	C8	C9
12 V	1000 pF, 2 kV	1000 pF, 2 kV	1000 pF, 2 kV
24 V			1000 pF, 2 kV
48 V			1000 pF, 2 kV
JCK40 Dual	C7	C8	C9
12 V	1000 pF, 2 kV	1000 pF, 2 kV	
24 V			1000 pF, 2 kV
48 V			1000 pF, 2 kV

External Output Trim

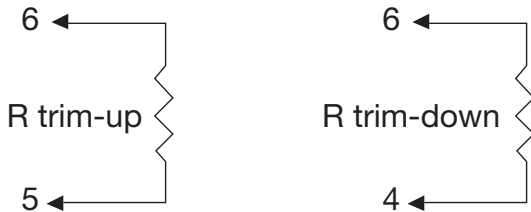


Output can be externally trimmed using this method.

Contact sales for details.

Derating Curves

12 V Input

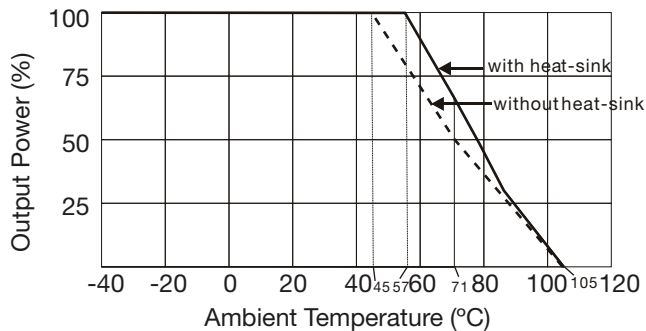

24 & 48 V Input

