


The IM series is housed in a SIP9 PCB mount plastic package. Featuring a 4:1 input voltage range of 9 to 36VDC or 18 to 75VDC with both single and dual outputs, singles have 3.3, 5, 12 or 15VDC with duals having ± 5 , ± 12 or ± 15 VDC.


The 2W IM has regulated outputs and provides 1.5kVDC isolation between input and output, remote On/Off & short circuit protection are standard. Operating temperature range is from -40°C to +100°C, with derating above +75°C.

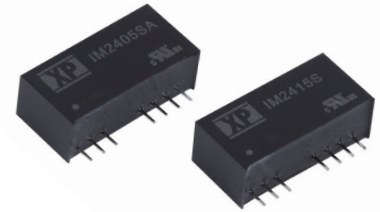

Features

- ▶ Regulated single & dual outputs
- ▶ 4:1 input range
- ▶ Single outputs 3.3 to 15VDC
- ▶ Dual outputs ± 5.0 to ± 15 VDC
- ▶ SIP9 package
- ▶ 1.5kVDC isolation
- ▶ Continuous short circuit protection
- ▶ Remote On/Off
- ▶ -40°C to +85°C operating temperature
- ▶ Full power to +75°C
- ▶ 3 year warranty

Applications

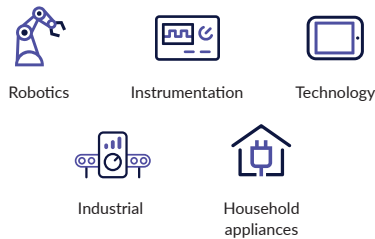

Dimensions

31.7 x 20.3 x 10.4mm (1.25" x 0.8" x 0.40")

Models & ratings

Model number	Input voltage	No load input current ^(1,3)	Output voltage	Output current	Efficiency	Maximum capacitive load
IM2403SA	9.0-36.0VDC	10mA	3.3VDC	500mA	75%	2200 μ F
IM2405SA		10mA	5.0VDC	400mA	81%	1000 μ F
IM2412SA		10mA	12.0VDC	165mA	84%	165 μ F
IM2415SA		10mA	15.0VDC	135mA	85%	100 μ F
IM2405S		10mA	± 5.0 VDC	± 200 mA	81%	± 470 μ F
IM2412S		10mA	± 12.0 VDC	± 85 mA	83%	± 100 μ F
IM2415S		10mA	± 15.0 VDC	± 65 mA	82%	± 47 μ F

Continued on page 2

Notes:

1. Operation at no load will not damage the converter but may not meet all specifications.

2. When one output is set to 100% load and the other varies between 25%-100% load.

3. Input current measured at nominal input voltage

Models & ratings

Model number	Input voltage	No load input current ^(1,3)	Output voltage	Output current	Efficiency	Maximum capacitive load
IM2403SA	18.0-75.0VDC	5mA	3.3VDC	500mA	75%	2200 μ F
IM2405SA		5mA	5.0VDC	400mA	80%	1000 μ F
IM2412SA		5mA	12.0VDC	165mA	84%	165 μ F
IM2415SA		5mA	15.0VDC	135mA	84%	100 μ F
IM2405S		5mA	$\pm$ 5.0VDC	$\pm$ 200mA	80%	$\pm$ 470 μ F
IM2412S		5mA	$\pm$ 12.0VDC	$\pm$ 85mA	81%	$\pm$ 100 μ F
IM2415S		5mA	$\pm$ 15.0VDC	$\pm$ 65mA	84%	$\pm$ 47 μ F

Notes:

- Operation at no load will not damage the converter but may not meet all specifications.
- When one output is set to 100% load and the other varies between 25%-100% load.
- Input current measured at nominal input voltage

Input

Characteristic	Minimum	Typical	Maximum	Units	Notes & conditions
Input voltage range	See models & ratings table				
Input reflected ripple current		20		mA pk-pk	12 μ H inductor and 47 μ F capacitor, 5Hz to 20MHz
Input filter	Capacitor				
Input surge		50		VDC	24VDC, 100ms
		100			48VDC, 100ms

Output

Characteristic	Minimum	Typical	Maximum	Units	Notes & conditions
Output voltage	See models & ratings table				
Minimum load	0			%	No minimum load required
Line regulation			$\pm$ 0.5	%	
Load regulation			$\pm$ 0.5	%	From 10-100% load, operation at no load will not damage the converter but may not meet all specifications.
Setpoint accuracy			$\pm$ 1	%	
Ripple & noise		50		mV pk-pk	20MHz bandwidth
Temperature coefficient		0.02		%/ $^{\circ}$ C	
Short circuit protection	Continuous with auto recovery (foldback)				
Cross regulation		$\pm$ 5		%	On dual outputs, when one output is set to 100% load and the other varies between 25%-100% load.
Remote on/off	Pin floating or pulled to -Vin				On
	Pin driven to +2.7 to 15 VDC with respect to -Vin				Off
			15	VDC	Vmax

General

Characteristic	Minimum	Typical	Maximum	Units	Notes & conditions
Efficiency	See models & ratings table				
Isolation voltage		1500		VDC	
Isolation capacitance			500	pF	
Isolation resistance		10^9		Ω	
Switching frequency		250		kHz	
Mean time between failure		>1.2		Mhrs	MIL-HDBK-217F, +25 $^{\circ}$ C GB


Environmental

Characteristic	Minimum	Typical	Maximum	Units	Notes & conditions
Operating temperature	-40		+100	°C	Derate from 100% load at +75°C to 0% load at +100°C
Storage temperature	-40		+125	°C	
Case temperature			+100	°C	
Cooling	Convection cooled				

Safety approvals

Certification	Standard	Notes & conditions
UL	UL60950-1, CAN/CSA C22.2 No.60950-1, UL62368-1	Information technology
CE	Meets all applicable directives	
UKCA	Meets all applicable legislation	

Mechanical details

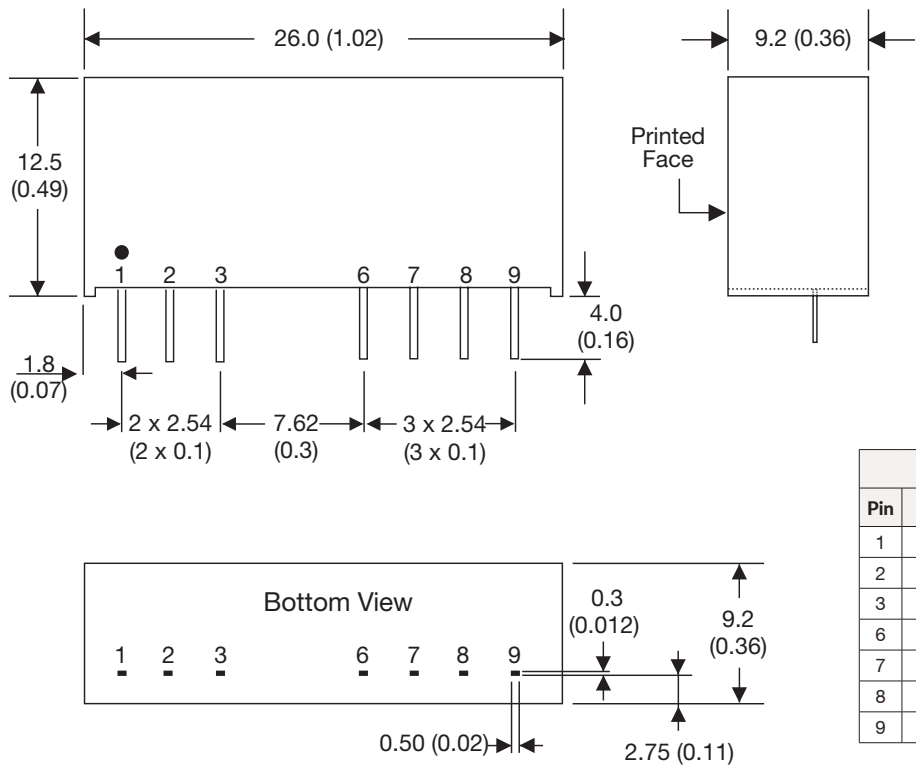

Pin connections		
Pin	Single	Dual
1	-V Input	-V Input
2	+V Input	+V Input
3	Remote On/Off	Remote On/Off
6	+V Output	+V Output
7	N.C.	Common
8	N.C.	N.C.
9	-V Output	-V Output

- Notes:
- 1. All dimensions in inches (mm)
 - 2. Weight: 6.5g (0.014lbs)

- 3. Pin pitch tolerance: ± 0.35 (± 0.014)
- 4. Case tolerance: ± 0.5 (± 0.02)